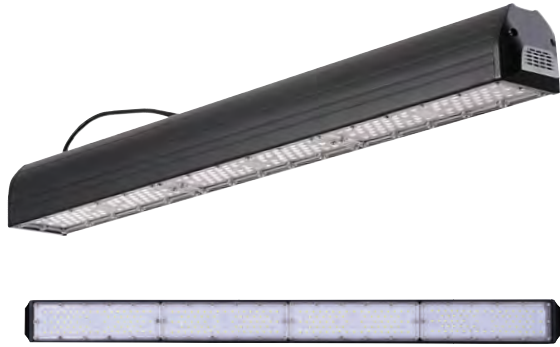
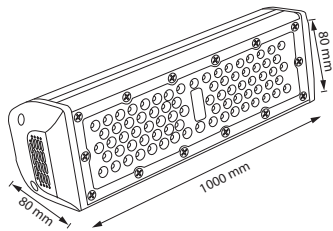


# LED LINEAR HIGH BAY LAMP

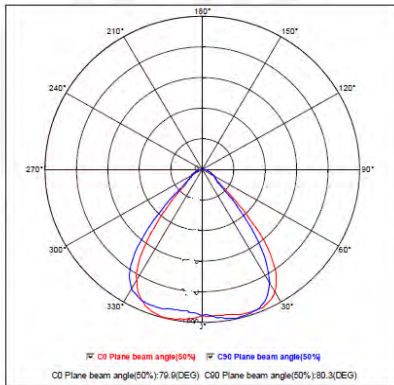

**Mountable**

**Hangable**

## Technical Drawing



Planar Intensity Distribution Curve


 Product&Family Code: **063 005 0200**
**ZEUGMA-200**

## Technical Data

Voltage (V)	100-265V
Product Wattage (W)	200
Equivalence with incandescent lamp(W)	1600
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	6400K
Materials	Aluminium Body
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	18600
Luminous Efficacy (lm/W)	93
Rated Life (hrs) ⌚	50000
IP Rating	65
Power Factor	>0.9
Beam Angle	90°
Starting Time	<0.2s
Number of ON-OFF cycling	25.000

## Applications

- Warehouse, indoor and outdoor lighting areas.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

